


iQ500, Gas hob, 75 cm, Black EP7A6SB20

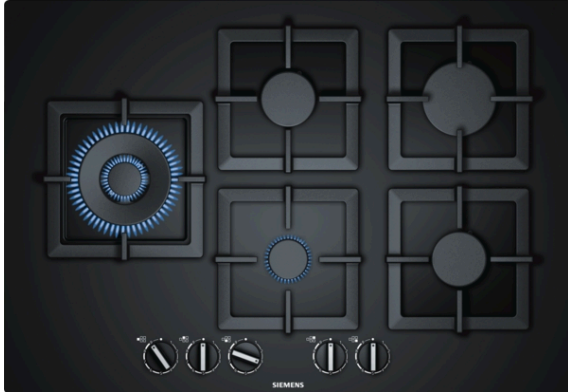

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology – Precise flame control with nine different settings.
- ✓ This wok burner with up to 4.0 kW of power (depending on gas type) is ideal for a wide variety of foods, even in large quantities.
- ✓ For flush or slightly raised installation.
- ✓ High-quality materials and workmanship – individual cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.

Features

Technical Data

Product name/family : gas hob w integrated controls
 Construction type : Built-in
 Energy input : Gas
 Total number of positions that can be used at the same time : 5
 Type of control setting devices : sword knobs
 Min. required niche size for installation (HxWxD) : 45 x 610-612 x 480-492 mm
 Width of the appliance : 752 mm
 Dimensions : 58 x 752 x 520 mm
 Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm
 Net weight : 18.0 kg
 Gross weight : 19.5 kg
 Residual heat indicator : no
 Location of control panel : Hob front
 Basic surface material : Tempered glass
 Color of surface : Black
 Color of frame : Black
 Length electrical supply cord : 100 cm
 EAN code : 4242003690512
 Electrical connection rating : 1 W
 Gas connection rating : 11500 W
 Fuse protection : 3 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz

!!

**2E20AD-
gjafbc!**

iQ500, Gas hob, 75 cm, Black EP7A6SB20

Features

Design

- Tempered glass hob surface, black
- For a flush or slightly raised built-in solution.: install the hob either flush or slightly raised on the worktop
- Cast iron single pan supports

Usage convenience

- stepFlame Technology: precisely adjust the flame in nine defined and repeatable levels.
- Sword control knobs: easily access knobs in front with strong grip for effortless turning.
- 1-handed ignition via control knobs: just push and turn the knob to ignite the flame.

Burners and power

- 5 Gas burners
- Left: Wok burner up to 4 KW (depending on gas type)
- Center front: Economy burner up to 1 KW (depending on gas type)
- Center rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Preset for natural gas (20mbar)
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 610 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 11.5 KW

Dimensioned drawings

