


**iQ700**  
**EX375FXB1E stainless steel**  
**SE Top Frame**  
**30 cm Induction Domino ceramic**

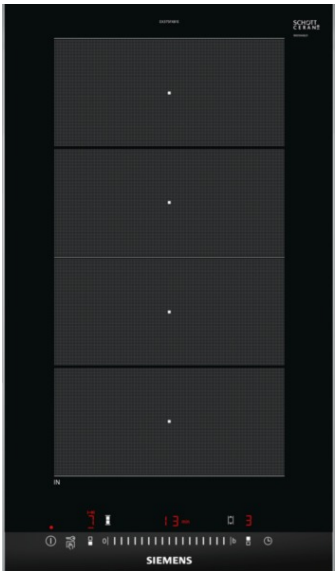

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures – activated by touch.

## Features

### Technical Data

Product name/family : Vario/Domino cooking zone cera  
Built-in / Free-standing : CONSTR\_TYPE.Built-in  
Source of energy : Electric  
Total number of positions that can be used at the same time : 2  
Required niche size for installation (HxWxD) : 51 x 270 x 490-500  
Width (mm) : 302  
Dimensions of the product (mm) : 51 x 302 x 520  
Net weight (kg) : 8.0  
Gross weight (kg) : 9.0  
Residual heat indicator : Separate  
Location of control panel : Hob front  
Basic surface material : Ceramic  
Color of surface : Black, Stainless steel  
Color of frame : Stainless steel  
Approval certificates : AENOR, CE  
Length electrical supply cord (cm) : 110  
EAN code : 4242003697405  
Electrical connection rating (W) : 3700  
Voltage (V) : 220-240  
Frequency (Hz) : 60; 50









iQ700  
EX375FXB1E stainless steel  
SE Top Frame  
30 cm Induction Domino ceramic

Features	
<p><b>Design:</b></p> <ul style="list-style-type: none"><li>• New design (of printing)</li><li>• SE Top Frame</li><li>• Glass ceramic without decor</li><li>• Flex zone</li><li>• Can be combined with all hobs in comfort design</li></ul> <p><b>Comfort:</b></p> <ul style="list-style-type: none"><li>• 2 induction cooking zones</li><li>• Switch off timer for every cooking zone Timer Count-up timer</li><li>• Energy efficiency display</li></ul> <p><b>Power and size:</b></p> <ul style="list-style-type: none"><li>• Cooking Zones: 1 x Ø 400 mmx210 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction</li></ul> <p><b>Environment+safety:</b></p> <ul style="list-style-type: none"><li>• Automatic pan recognition sensor powerManagement Function Safety switch-off Childproof lock Wipe protection function</li><li>• Digital 2-step Residual heat indicator</li><li>• Main switch</li><li>• reStart Function</li><li>• quickStart Function</li><li>• powerMove Plus</li></ul> <p><b>Professional equipment:</b></p> <ul style="list-style-type: none"><li>• Cable included</li><li>• Fixed power cable</li><li>• Connected load: 3.7 kW</li></ul> <p><b>Quickness:</b></p> <ul style="list-style-type: none"><li>• Boost function for all zones</li></ul> <p><b>Measurements:</b></p> <ul style="list-style-type: none"><li>• Installation measurements: 270 mmx490 mm</li><li>• Length wire connection: 110 cm</li><li>• Min. worktop thickness: 30 mm</li><li>• Connection cable (1.1 M )</li></ul> <p><b>Accessories</b></p> <ul style="list-style-type: none"><li>• Installation set to install 2 Dominos side by side</li></ul>	




iQ700  
EX375FXB1E stainless steel  
SE Top Frame  
30 cm Induction Domino ceramic

Dimensioned drawings

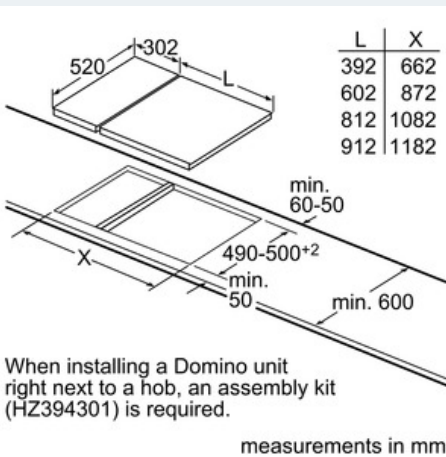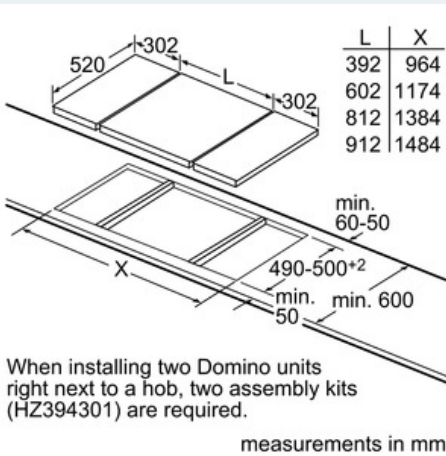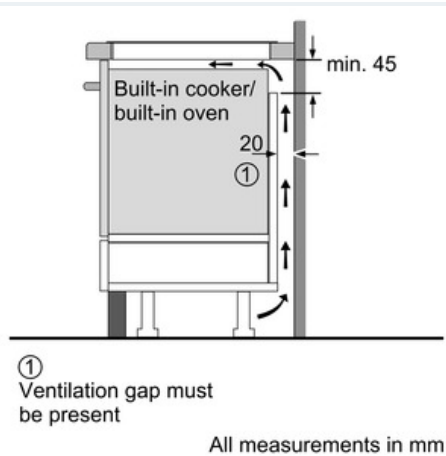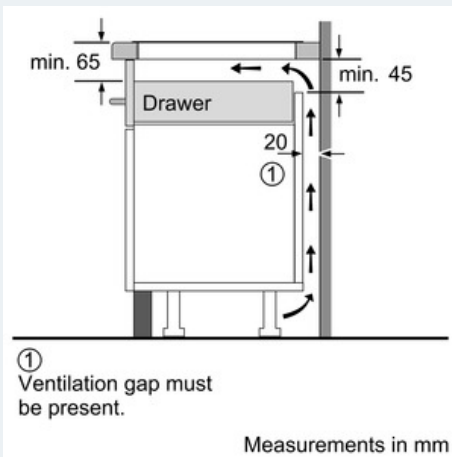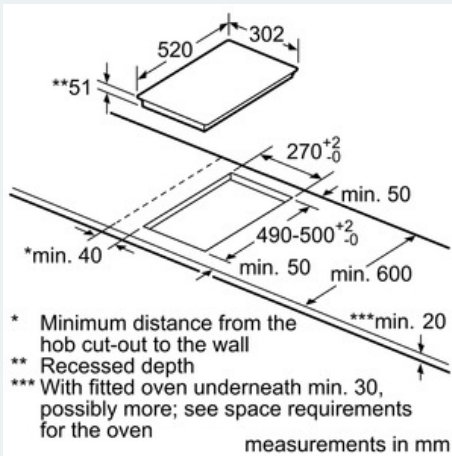
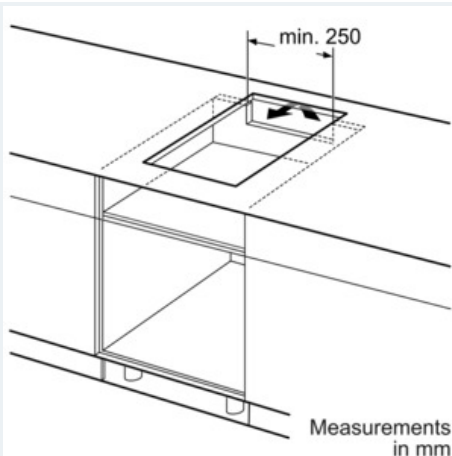


iQ700  
EX375FXB1E stainless steel  
SE Top Frame  
30 cm Induction Domino ceramic

Dimensioned drawings

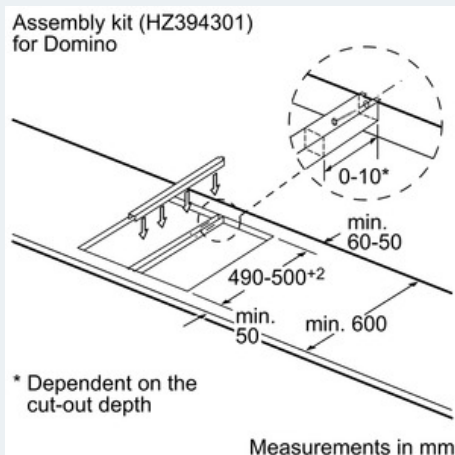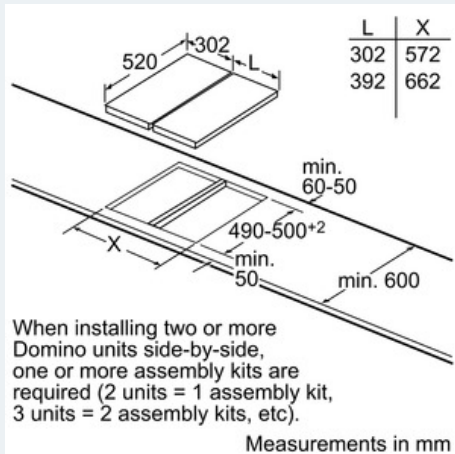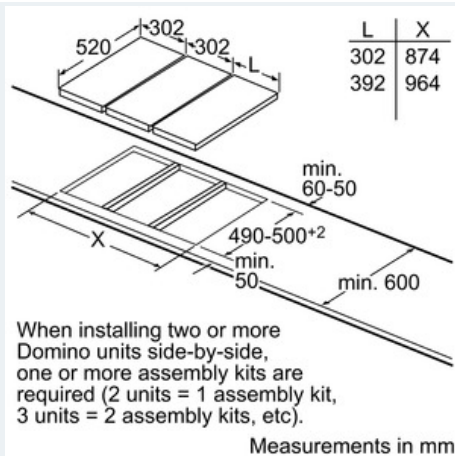

Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions

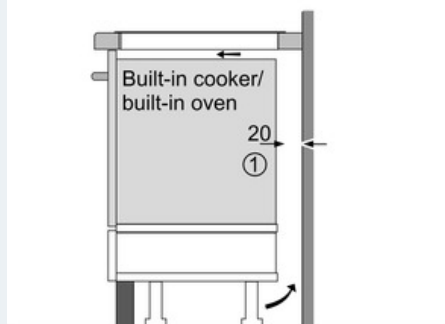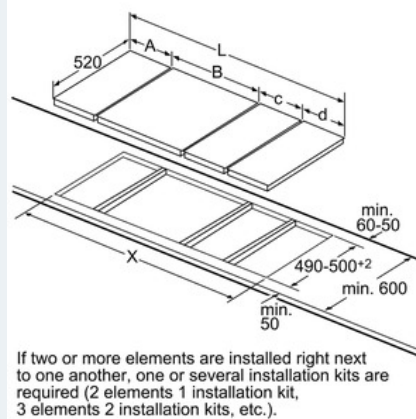

① Ventilation gap must be present.

Measurements in mm

Domino combination possibilities with corresponding device and cutout dimensions

Width type: 30 40 60 70 80 90  
Device width: 302 392 602 710 812 912

	A	B	C	D	L	X
2x30	302	302	-	-	604	572
1x30, 1x40	302	392	-	-	694	662
1x30, 1x60	302	602	-	-	904	872
1x30, 1x70	302	710	-	-	1012	980
1x30, 1x80	302	812	-	-	1114	1082
1x30, 1x90	302	912	-	-	1214	1182
2x40	392	392	-	-	784	752
1x40, 1x60	392	602	-	-	994	962
1x40, 1x70	392	710	-	-	1102	1070
1x40, 1x80	392	812	-	-	1204	1172
1x40, 1x90	392	912	-	-	1304	1272
3x30	302	302	302	-	906	874
2x30, 1x40	302	302	392	-	996	964
2x30, 1x60	302	302	602	-	1206	1174
2x30, 1x70	302	302	710	-	1314	1282
2x30, 1x80	302	302	812	-	1416	1384
2x30, 1x90	302	302	912	-	1516	1484
1x30, 2x40	302	392	392	-	1086	1054
1x30, 1x40, 1x60	302	392	602	-	1296	1264
1x30, 1x40, 1x70	302	392	710	-	1404	1372
1x30, 1x40, 1x80	302	392	812	-	1506	1474
1x30, 1x40, 1x90	302	392	912	-	1606	1574
3x40	392	392	392	-	1176	1144
2x40, 1x60	392	392	602	-	1386	1354
4x30	302	302	302	302	1208	1176
3x30, 1x40	302	302	302	392	1298	1266
2x30, 2x40	302	302	392	392	1388	1356
1x30, 3x40	302	392	392	392	1478	1446