


iQ700
EX975LXC1E
SE Top Frame
90 cm Induction Ceramic hob

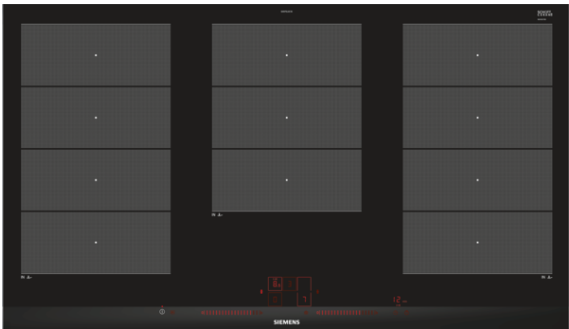

The Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ dual lightSlider lets you easily and intuitively operate the hob.
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ fryingSensor: maintains the desired pan temperature automatically after heating up to avoid scorching.

Features

Technical Data

Product name/family : Cooking zone ceramic
Construction type : Built-in
Energy input : Electric
Total number of positions that can be used at the same time : 5
Required niche size for installation (HxWxD) : 51 x 880-880 x 490-500
Width of the product (mm) : 912
Dimensions of the product (mm) : 51 x 912 x 520
Dimensions of the packed product (HxWxD) (mm) : 126 x 1073 x 603
Net weight (kg) : 22.1
Gross weight (kg) : 24.0
Residual heat indicator : Separate
Location of control panel : Hob front
Basic surface material : Ceramic
Color of surface : Alu, brushed, Black
Color of frame : Alu, brushed
Approval certificates : AENOR, CE
Length electrical supply cord (cm) : 110
EAN code : 4242003692301
Electrical connection rating (W) : 11100
Voltage (V) : 220-240
Frequency (Hz) : 50; 60



Optional accessories

00467884 Wok

iQ700
EX975LXC1E
SE Top Frame
90 cm Induction Ceramic hob

Features

Design:

- SE Top Frame
- 3 Flex Zones
- Can be combined with all autarkic hobs in comfort design

Comfort:

- 5 Induction cooking zones
- Energy consumption display
- Cable included
- Dual lightSlider touch control
- 17 power levels
- Switch off timer for every cooking zone
- Timer
- Count-up timer
- reStart Function
- quickStart Function
- powerMove Plus

Power and size:

- Cooking zones: 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 300 mmx240 mm, 2.6 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Environment+safety:

- Automatic pan recognition sensor
- powerManagement function
- Safety switch-off
- Childproof lock
- Wipe protection function
- Digital 2-step Residual heat indicator
- Residual heat indicator for each zone
- Main switch
- Connected load: 11.1 kW

Professional equipment:

- fryingSensor Plus with 5 temperature settings

Quickness:






- PowerBoost function for all zones
- panBoost

Measurements:

- Installation measurements: 880 mmx490 mm
- Length wire connection: 110 cm
- Connection cable (1.1 M)
- Min. worktop thickness: 30 mm

iQ700
EX975LXC1E
SE Top Frame
90 cm Induction Ceramic hob

Dimensioned drawings

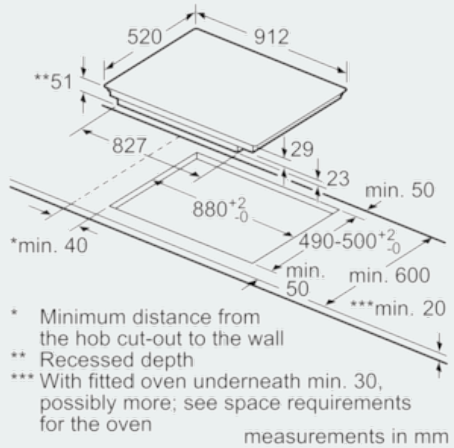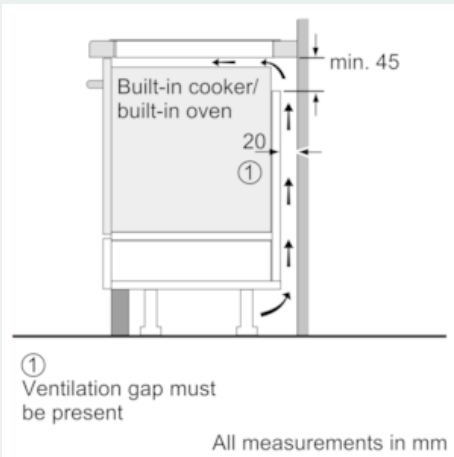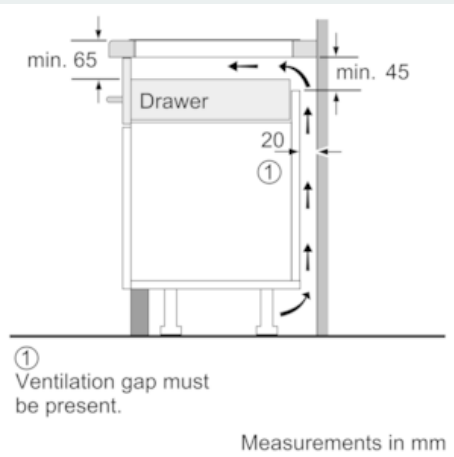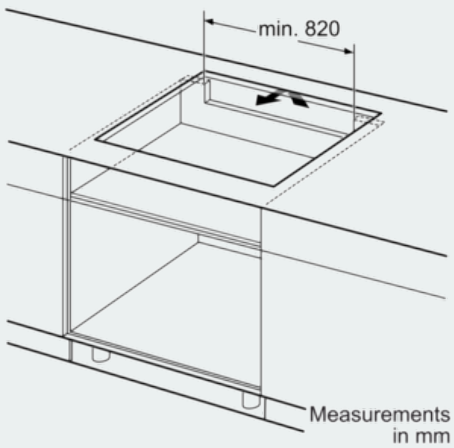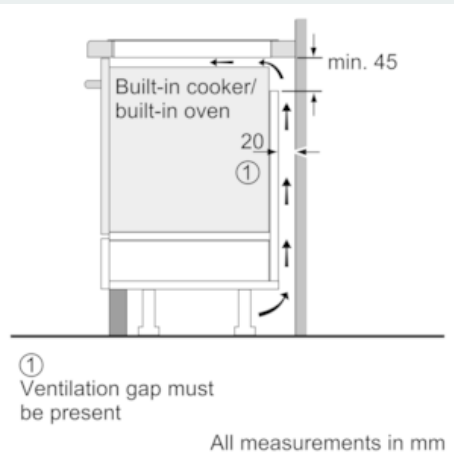

* Minimum distance from the hob cut-out to the wall
** Recessed depth
*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven