

## iQ300, free-standing fridge-freezer with freezer at bottom, 203 x 60 cm, Inox-look KG39N2LEC



Bottom freezer with hyperFresh Box to keep fruit and vegetables fresh for longer, plus noFrost for no more defrosting.

- ✓ noFrost – Never defrost your freezer again.
- ✓ No distance – Place your refrigerator directly against the wall or a niche without a gap.
- ✓ All your foods provided in view and within reach by movable glass shelves – easyAccess.
- ✓ Thanks to the easyAccess freezer box your frozen food is always within reach and you can even store oversized foods.
- ✓ Reduces the temperature for a set time to quickly cool down fresh food items - superCooling.

### Features

#### Technical Data

Energy Efficiency Class (Regulation (EU) 2017/1369): E  
 Average annual energy consumption in kilowatt hour per year (kWh/a): 238 kWh/annum  
 Sum of volume of frozen compartments: 89 l  
 Sum of volume of chill compartments: 279 l  
 Airborne acoustical noise emissions : 39 dB(A) re 1 pW  
 Airborne acoustical noise emission class: C  
 Built-in / Free-standing: Free-standing  
 Door panel options: Not possible  
 Height: 2030 mm  
 Width of the appliance: 600 mm  
 Depth of the product: 660 mm  
 Net weight: 71.6 kg  
 Connection Rating: 100 W  
 Fuse protection: 10 A  
 Door hinge: Right reversible  
 Voltage: 220-240 V  
 Frequency: 50 Hz  
 Length electrical supply cord: 240.0 cm  
 Number of compressors: 1  
 Number of independent cooling systems: 2  
 Interior ventilator: No  
 Reversible Door Hinge: Yes  
 Number of Adjustable Shelves in fridge compartment: 3  
 Shelves for Bottles: No  
 Installation typology: N/A

### Included accessories

- 3 x egg tray
- 1 x ice cube tray



**iQ300, free-standing fridge-freezer  
with freezer at bottom, 203 x 60 cm,  
Inox-look  
KG39N2LEC**

Features

**Performance and consumption**

**Design and Styling**

- Doors Inox-look, side panels Pearl grey (VZF 07127)
- Integrated vertical handle
- LED with Soft Start in fridge section

**Convenience & Safety**

- noFrost
- Twin LED electronic control
- Two Cooling Systems
- Optical and acoustic door open warning system
- Super Cooling: automatic deactivation
- Automatic defrost in fridge section

**Fridge Compartment**

- 5 safety glass shelves of which 3 are height adjustable, 4 x easyAccess Shelf, extendable
- 1 door bin(s) high, 3 door bin(s) small

**Freshness System**

- 1 hyperFresh #0°C# box - fish and meat stay fresh for longer.
- 1 hyperFresh box with adjustable humidity - keeps fruit and vegetables fresh for longer.

**Freezer**

- 3 transparent freezer drawers

**Dimensions**

- Appliance Dimensions ( H x W x D): 203 cm x 60 cm x 66.0 cm

**Technical Information**

- Door right hinged, reversible
- Height adjustable front feet
- Connected load: 100 W
- Nominal voltage: 220 - 240 V

**Accessories**

- ice cube tray
- egg tray
- ice cube tray
- egg tray

**Country Specific Options**

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the attached distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.

**General Information**

**Environment and Safety**




**Installation**

- Super Freezing: Manual/automatic activation
- Vario Zone - removable glass shelves for extra space in freezer
- 1 ice cube tray
- 3 egg trays
- Freezing possible in all freezer compartments
- Multi Airflow-System

- Bottle storage: none/0
- 
- Energy Class: E
- Total Volume: 368 l
- Net Fridge Volume : 279 l
- Net Freezer Volume : 89 l
- Freezing capacity 24h: 10 kg
- Annual Energy Consumption: 238 kWh/a
- Climate Class: SN-T
- Fast Freeze Facility
- Noise Level : 39 dB , C Class
- Temperature rise time : 12 H

**iQ300, free-standing fridge-freezer  
with freezer at bottom, 203 x 60 cm,  
Inox-look  
KG39N2LEC**

Dimensioned drawings

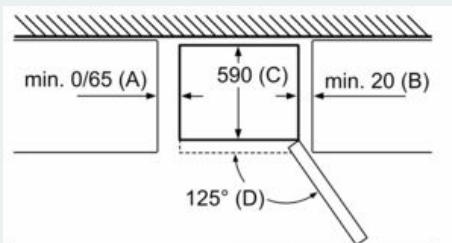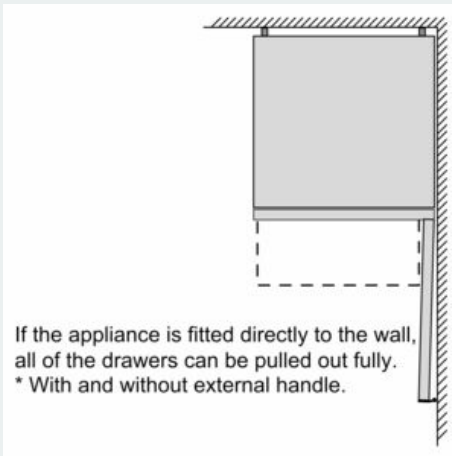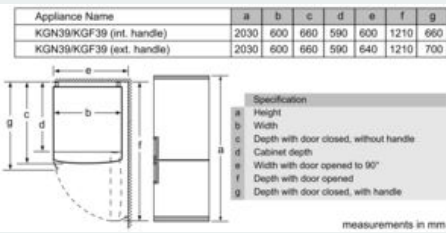

Appliance name	A	B	C	D
KG39N2, 36, 39, 46, 49	0/65	20	590	125
KG39N2, 49	0/65	20	590	125

Dimension A:  
In models with vertical integrated handles, in order to open easily, a minimum distance of 65 mm is needed.

measurements in mm