# **PHILIPS** Lighting



A ↑ G

# MASTER VALUE LEDs pot LV

# MASTER LED spot VLE D 5.8-35W MR16 930 36D

Philips MASTER VALUE MR16 is the series of Low Voltage (12VAC) Halogen MR16 replacements. Not only does it employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V Halogen electronic transformers. It also delivers beam intensity which is equivalent to the 50W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact form with Halogen lamps.)

#### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


#### **Product data**

eral Information		Correlated Color Temperature (Nom)	
Base	GU5.3 [ GU5.3]	Luminous Efficacy (rated) (Nom)	
RoHS compliant	Yes	Color Consistency	<6
nal Lifetime (Nom)	25000 h	Color Rendering Index (Nom)	90
ching Cycle	50000X	LLMF At End Of Nominal Lifetime (Nor	<b>m)</b> 70 %
lux measurement reference	Narrow Cone	Luminous Flux in 90° Cone (Rated)	460 lm
Light Technical		Operating and Electrical	
Color Code	930 [ CCT of 3000K]	Input Frequency	- Hz
Beam Angle (Nom)	36 °	Power (Nom)	5.8 W
uminous Flux (Nom)	460 lm	Lamp Current (Nom)	510 mA
uminous Intensity (Nom)	1300 cd	Wattage Equivalent	35 W
Color Designation	White (WH)	Starting Time (Nom)	0.5 s

## MASTER VALUE LEDspot LV


Warm Up Time to 60% Light (Nom)	0.5 s	Energy Consumption kWh/1000 h	6 kWh
Power Factor (Nom)	0.7	EPREL Registration Number	453174
Voltage (Nom)	ac electronic 12 V		
		Product Data	
Temperature		Full product code	871951430720900
T-Case Maximum (Nom)	85 °C	Order product name	MASTER LED spot VLE D 5.8-35W MR16 930
			36D
Controls and Dimming		EAN/UPC - Product	8719514307209
Dimmable	Only with specific dimmers	Order code	929002492602
		Numerator - Quantity Per Pack	1
Mechanical and Housing		Numerator - Packs per outer box	10
Bulb Shape	MR16 [ 2inch/50mm]	Material Nr. (12NC)	929002492602
		Net Weight (Piece)	0.045 kg
Approval and Application			
Energy Efficiency Class	F		
Suitable For Accent Lighting	Yes		

#### **Dimensional drawing**




MR16 12V 5.5-35W 460lm 36D 3000K GU5.3 D

#### Photometric data



LEDspots MAS 5,8W MR16 GU5,3 930 36D


MASTER LED spot VLE D 5.8-35W MR16 930 36D 50.5 mm 45.5 mm	Product	D	с
	MASTER LED spot VLE D 5.8-35W MR16 930 36D	50.5 mm	45.5 mm

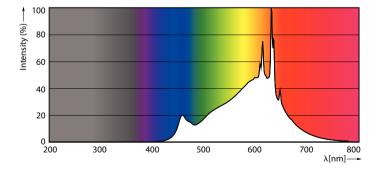

LEDspots MAS 5,8W MR16 GU5,3 930 36D


### MASTER VALUE LEDspot LV

#### Photometric data



LEDspots MAS 5,8W MR16 GU5,3 930 36D

#### Lifetime

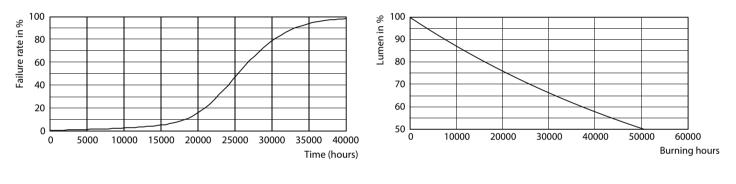

LEDspots LED 25K

LEDspots LMP 25K



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, December 21 - data subject to change