


## iQ300, Gas hob, 75 cm, Stainless steel EG7B5QB90

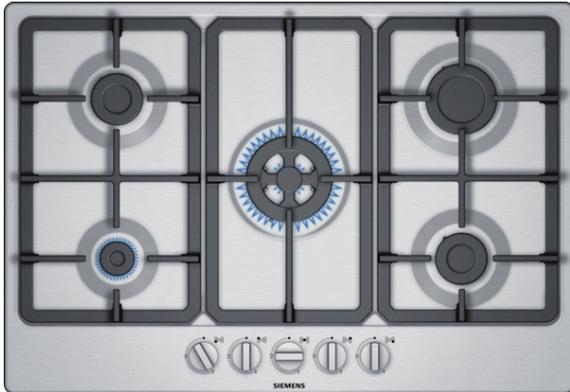

The gas hob with front-mounted controls.

- ✓ This wok burner with up to 3.3 kW of power (depending on gas type) is ideal for a wide variety of foods, even in large quantities.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.
- ✓ The sword knob combines highest ease of use with modern design.
- ✓ The uniquely beautiful stainless-steel surface design.

### Features

#### Technical Data

Product name/family : gas hob w integrated controls  
 Construction type : Built-in  
 Energy input : Gas  
 Total number of positions that can be used at the same time : 5  
 Type of control setting devices : sword knobs  
 Min. required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm  
 Width of the appliance : 750 mm  
 Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm  
 Net weight : 13.0 kg  
 Gross weight : 14.5 kg  
 Residual heat indicator : no  
 Location of control panel : Hob front  
 Basic surface material : Stainless steel  
 Color of surface : Stainless steel  
 Length electrical supply cord : 150 cm  
 EAN code : 4242003830581  
 Gas connection rating : 10800 W  
 Fuse protection : 3 A  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz



## iQ300, Gas hob, 75 cm, Stainless steel EG7B5QB90

### Features

#### Design

- Stainless steel surface
- Cast iron continuous pan supports

#### Usage convenience

- Sword control knobs: easily access knobs in front with strong grip for effortless turning.
- 1-handed ignition via control knobs: just push and turn the knob to ignite the flame.

#### Burners and power

- 5 Gas burners
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 3.3 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

#### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

#### Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Preset for natural gas (20mbar)
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 10.8 KW

iQ300, Gas hob, 75 cm, Stainless steel  
EG7B5QB90

Dimensioned drawings

