

GW051190

Optional accessories

installation accessories

warming drawer Gaggenau Expressive series  
60 x 14 cm  
GW051190

- Hygienic stainless steel and glass interior for effortless cleaning and elegant design
- Six power levels and four heating modes ensure consistent temperature control for various culinary needs

#### Highlights

Integrable in 14 cm high niche.  
Bright interior lighting.  
Cushioned closing system.  
Hygienic stainless steel interior with glass bottom.  
Direct temperature selection in the range 30 °C to 80 °C.  
Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

#### Heating methods

Preheating of small beverage containers/cups.  
Warming cookware/plates.  
Keeping meals warm.  
Low-temperature cooking.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programmes via Home Connect.

#### Handling

Touch key operation.

#### Features

Net volume 20 litres.  
Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions  
W548 mm x H 92 mm x D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)


Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.

#### Planning notes

Plan the niche without back wall.  
Installation of GO/GS/GM/GC directly above the drawer without intermediate shelf.  
Installation directly above a dishwasher is not allowed.  
Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.  
Front weight up to 3 kg.  
Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
Built-in under worktop or in single niche.  
The mains socket must be accessible and located outside the built-in niche.  
The socket can be planned behind the appliance.

#### Connection

Total connected load 0.82 kW.  
Connection cable 1.75 m, pluggable.

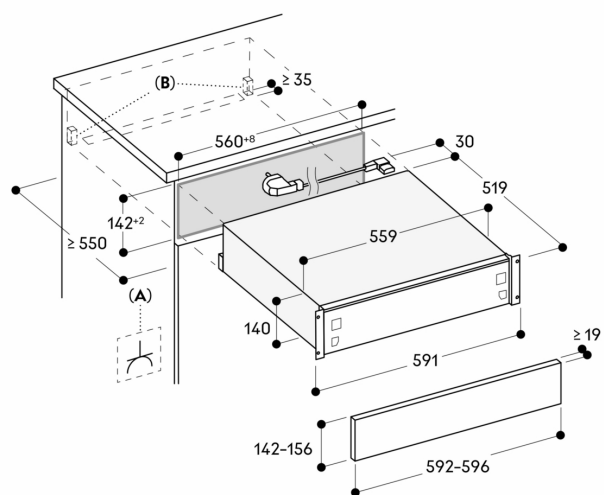

A: Accessible electrical connection  
B: Anti tilting

Measurements in mm