

iQ500, canopy cooker hood, 52 cm, Stainless steel
LB56NAC50



The powerful canopy cooker hood is seamlessly concealed in the upper cupboard or a brick chimney.

- ✓ Intensive setting revert - Peak performance when steam escapes, and an automatic revert after a few minutes.
- ✓ Seamless integration: thanks to flush installation design the canopy hood is almost invisible in an upper cabinet.
- ✓ pushbutton control: hassle-free cooking with low-lift push buttons
- ✓ LED light : Optimal visibility for your cooking adventures.
- ✓ cleanAir Plus odour filter: Filters odours, airborne pollen and allergens.

LZ10ITP00	Long Life odor filter (replacement)
LZ11ITD11	Long Life recirculation kit external
LZ11IXB16	Clean Air Plus odor filter (replacement)
LZ11IXC16	Clean Air Plus recirc. kit external
LZ55651	Standard odor filter (replacement)
LZ55750	Standard recirculation kit

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Required niche size for installation (HxWxD): 345mm x 496.0mm x 264mm mm
Net weight: 10.1 kg
Type of control: Electronic
Number of speed settings: 3-stages + intensive setting
Maximum output air extraction: 570 m³/h
Boost position output recirculating: 628 m³/h
Maximum output recirculating air: 560 m³/h
Boost position air extraction: 645 m³/h
Number of lights: 2
Noise level: 66 dB(A) re 1pW
Diameter of air outlet: 150 mm
Grease filter material: Washable aluminium
Odour filter: No
Operating Mode: Convertible
Optional accessories: LZ10ITP00, LZ11ITD11, LZ11IXB16, LZ11IXC16, LZ55651, LZ55750
Type of lamps used: LED
Total power of the lamps: 2 W
Grease filter type: Kasette
Clean filter reminders: No
Connection rating: 252 W
Fuse protection: 3 A
Voltage: 220-240 V
Frequency: 60; 50 Hz
Plug type: Gardy plug w/ earthing
Installation typology: Built-in
Body material: Stainless steel
Plug type: Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in): x x
Dimensions of the packed product: 15.15 x 18.89 x 23.89
Net weight: 22.000 lbs
Gross weight: 25.000 lbs
Motor location: Integrated motor in hood body
No-return airflow flap: No
Length electrical supply cord: 150.0 cm
Dimensions of the product, with chimney (if exists): .. 345 x 520.0 x 282.0 mm
Dimensions of the packed product (HxWxD): ... 385 x 480 x 607 mm
Net weight: 10.1 kg
Gross weight: 11.3 kg



iQ500, canopy cooker hood, 52 cm, Stainless steel LB56NAC50

Design:

- Canopy stainless steel
- For installation in a kitchen cabinet
- Flush-fitted installation for a seamless integration in wall cupboards
- Suitable for ducted or re-circulated extraction
- For recirculated extraction various recirculation kits are available as optional accessories.

Core Features:

- 2 x LED spot 1W
- Colour Temperature: 4000 K
- Light Intensity: 400 lux
- Capacitor motor
- 1 metal grease filter(s).

Comfort Features:

- Push button controls with Electronic display
- 3 speeds plus intensive setting
- Automatic reset from intensive to normal setting after 6 min

Cleaning Comfort:

- Metal grease filter dishwasher-safe
- Easy to clean smooth surfaces and materials

Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 295 m³/h; noise level 50 dB(A) re1pW
- Speed 2: extraction rate 445 m³/h; noise level 59 dB(A) re1pW
- Speed 3: extraction rate 570 m³/h; noise level 66 dB(A) re1pW
- Intensive Speed 1: extraction rate 645 m³/h; noise level 68 dB (A) re1pW
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 75.2 kWh/year
- Blower Efficiency Class: C
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: D

Performance Recirculation:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory):
- Speed 1: extraction rate 230 m³/h; noise level 62 dB(A) re1pW
- Speed 2: extraction rate 330 m³/h; noise level 69 dB(A) re1pW
- Speed 3: extraction rate 400 m³/h ; noise level 72 dB(A) re1pW
- Intensive Speed 1: extraction rate 410 m³/h; noise level 74 dB (A) re1pW
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air Plus recirculation kit, for chimless installation (available as optional accessory):
- Speed 1: extraction rate 280 m³/h ; noise level 56 dB(A) re1pW

- Speed 2: extraction rate 430 m³/h ; noise level 64 dB(A) re1pW
- Speed 3: extraction rate 560 m³/h ; noise level 69 dBA) re1pW
- Intensive Speed 1: extraction rate 628 m³/h ; noise level 72 dB (A) re1pW

Technical Information and Sustainability:


- Consumption data:
- Power rating: 252 W
- Voltage: 220 - 240 V
- Sustainability:
- Environmentally friendly packaging
- Available odour filter as regenerative Long Life filter with 10 years lifetime

Planning and Installation Information:


- Dimensions (HxWxD): 345 x 520 x 282 mm
- Dimensions recirculating installation (HxWxD): 345 mm -345 mm x 520 mm x 282 mm
- Built-in dimensions (HxWxD): 345 x 496 x 264 mm
- Please reference the built-in dimensions provided in the installation drawing
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm

iQ500, canopy cooker hood, 52 cm, Stainless steel
LB56NAC50


Measurements in mm

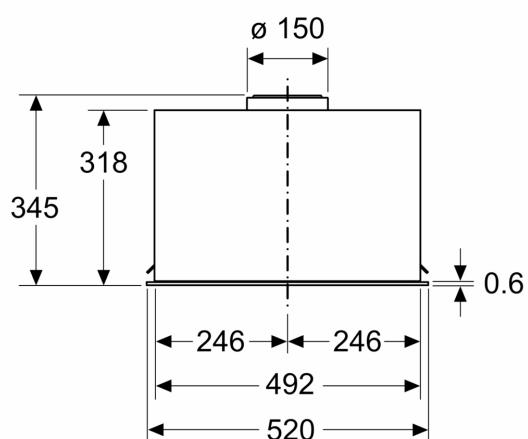


Measurements in mm

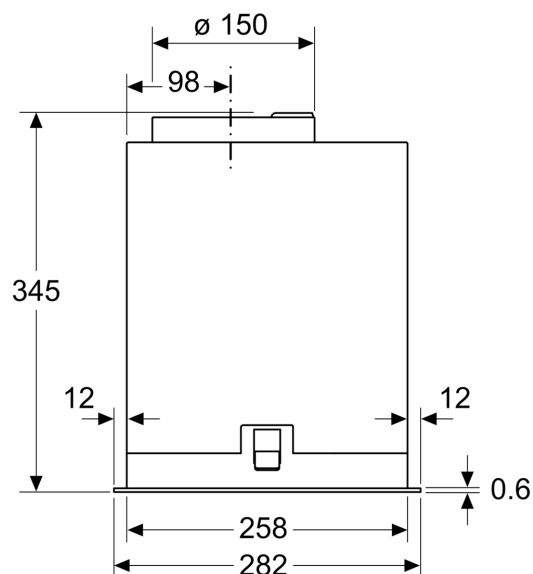

Measurements in mm

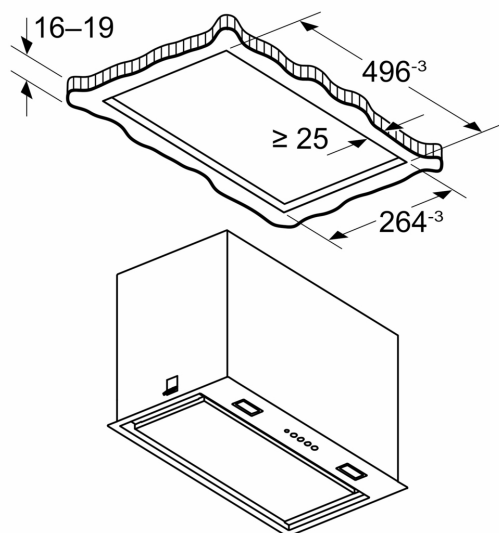

Measurements in mm

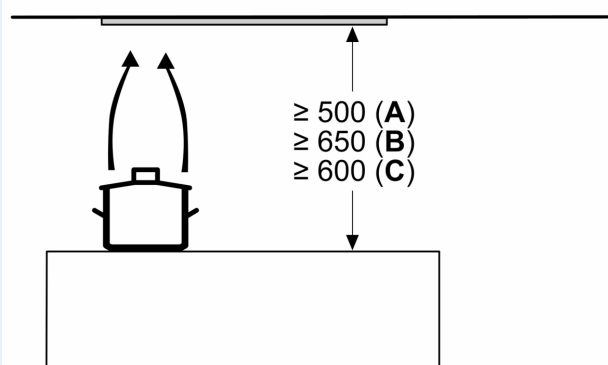

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand