

iQ700, canopy cooker hood, 70 cm, Black
LB78NPC60



Optional accessories

LZ10ITP00	Long Life odor filter (replacement)
LZ11ITD11	Long Life recirculation kit external
LZ11IXB16	Clean Air Plus odor filter (replacement)
LZ11IXC16	Clean Air Plus recirc. kit external
LZ55651	Standard odor filter (replacement)
LZ55750	Standard recirculation kit

The powerful canopy cooker hood is seamlessly concealed in the upper cupboard or a brick chimney.

- ✓ Intensive setting revert - Peak performance when steam escapes, and an automatic revert after a few minutes.
- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ Seamless integration: thanks to flush installation design the canopy hood is almost invisible in an upper cabinet.
- ✓ Grease filter saturation - Automatic reminders to clean the metal grease filters and ensure their performance.
- ✓ pushbutton control: hassle-free cooking with low-lift push buttons

Features

Technical Data

Typology:	Built-in/Built-under
Length electrical supply cord:	150.0 cm
Required niche size for installation (HxWxD):	345mm x 676.0mm x 264mm mm
Net weight:	11.1 kg
Type of control:	Electronic
Number of speed settings:	3-stages + intensive setting
Maximum output air extraction:	590 m³/h
Boost position output recirculating:	760 m³/h
Maximum output recirculating air:	560 m³/h
Boost position air extraction:	800 m³/h
Number of lights:	2
Noise level:	61 dB(A) re 1pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable aluminium
Odour filter:	No
Operating Mode:	Convertible
Optional accessories:	LZ10ITP00, LZ11ITD11, LZ11IXB16, LZ11IXC16, LZ55651, LZ55750
Type of lamps used:	LED
Total power of the lamps:	2 W
Grease filter type:	Kassette
Clean filter reminders:	Yes
Connection rating:	172 W
Fuse protection:	3 A
Voltage:	220-240 V
Frequency:	60; 50 Hz
Plug type:	Gardy plug w/ earthing
Installation typology:	Built-in
Body material:	Stainless steel
Plug type:	Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in):	x x
Dimensions of the packed product:	15.15 x 18.89 x 30.98
Net weight:	24.000 lbs
Gross weight:	27.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	No
Length electrical supply cord:	150.0 cm
Dimensions of the product, with chimney (if exists):	345 x 700.0 x 282.0 mm
Dimensions of the packed product (HxWxD):	385 x 480 x 787 mm
Net weight:	11.1 kg
Gross weight:	12.4 kg




iQ700, canopy cooker hood, 70 cm, Black
LB78NPC60

Features	
Design: • Canopy matt black • For installation in a kitchen cabinet • Flush-fitted installation for a seamless integration in a wall cupboard • Suitable for ducted or re-circulated extraction • For recirculated extraction various recirculation kits are available as optional accessories. Core Features: • 2 x LED spot 1W with color temperature selectable from 2 fixed values • softLight: the lighting elements switch on and off smoothly • Light dimmer function : the brightness of the lighting elements can be adjusted. • Colour Temperature: 4000 K • Light Intensity: 300 lux • Efficient BLDC-technology • 2 metal grease filter(s) Comfort Features: • Push button controls with Electronic display • Saturation indicator for grease filter • Automatic 10 minutes after running • Interval operation: the hood switches on and off in the selected setting for the selected time. • 3 speeds plus intensive setting • Automatic reset from intensive to normal setting after 6 min Cleaning Comfort: • Metal grease filter dishwasher-safe • Easy to clean smooth surfaces and materials Performance Exhaust: • According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: • Speed 1: extraction rate255 m3/h; noise level 41 dB(A) re1pW • Speed 2: extraction rate385 m3/h; noise level 51 dB(A) re1pW • Speed 3: extraction rate590 m3/h; noise level 61 dB(A) re1pW • Intensive Speed 1: extraction rate800 m3/h; noise level 69 dB (A) re1pW • Energy Efficiency Class: A++ (at a range of energy efficiency classes from A+++ to D) • Average Energy Consumption: 31 kWh/year • Blower Efficiency Class: A • Lighting Efficiency Class: A • Grease Filtering Efficiency Class: D Performance Recirculation: • According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory): • Speed 1: extraction rate180 m3/h; noise level 56 dB(A) re1pW • Speed 2: extraction rate250 m3/h; noise level 62 dB(A) re1pW	• Speed 3: extraction rate350 m3/h ; noise level 70 dB(A) re1pW) • Intensive Speed 1: extraction rate440 m3/h; noise level 75 dB (A) re1pW) • According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air Plus recirculation kit, for chimless installation (available as optional accessory): • Speed 1: extraction rate240 m3/h ; noise level 49 dB(A) re1pW • Speed 2: extraction rate365 m3/h ; noise level 57 dB(A) re1pW • Speed 3: extraction rate560 m3/h ; noise level 68 dBA) re1pW • Intensive Speed 1: extraction rate760 m3/h ; noise level 74 dB (A) re1pW Technical Information and Sustainability: • Consumption data: • Power rating: 172 W • Voltage: 220 - 240 V • Sustainability: • Environmentally friendly packaging • Available odour filter as regenerative Long Life filter with 10 years lifetime Planning and Installation Information: • Dimensions (HxWxD): 345 x 700 x 282 mm • Dimensions recirculating installation (HxWxD): 345 mm - 345 mm x 700 mm x 282 mm • Built-in dimensions (HxWxD): 345 mm x 676 mm x 264 mm • Please reference the built-in dimensions provided in the installation drawing • Electrical cable length 1.5 m • Diameter pipe Ø 150 mm


iQ700, canopy cooker hood, 70 cm, Black LB78NPC60

Dimensioned drawings


Measurements in mm

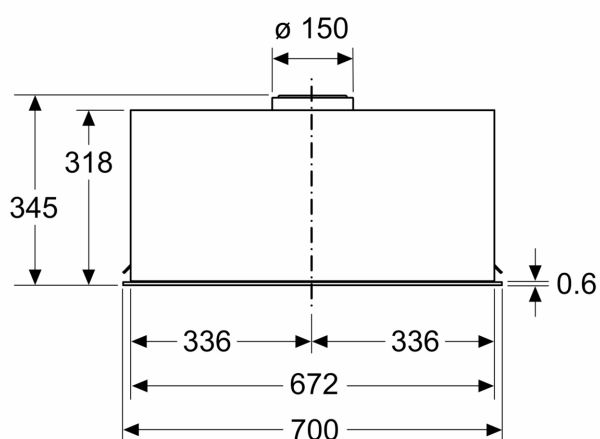


Measurements in mm

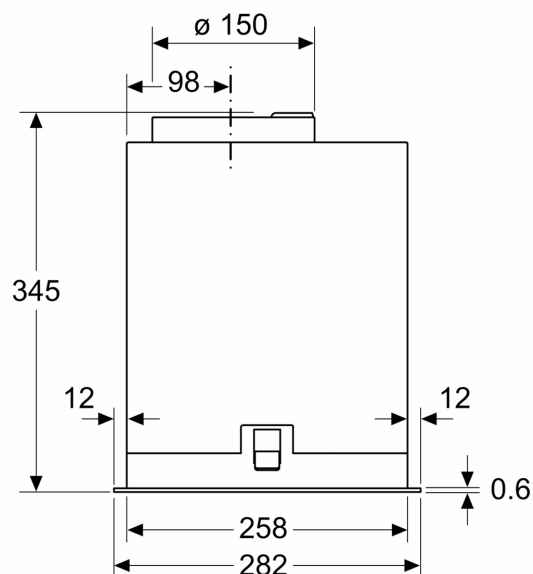

Measurements in mm

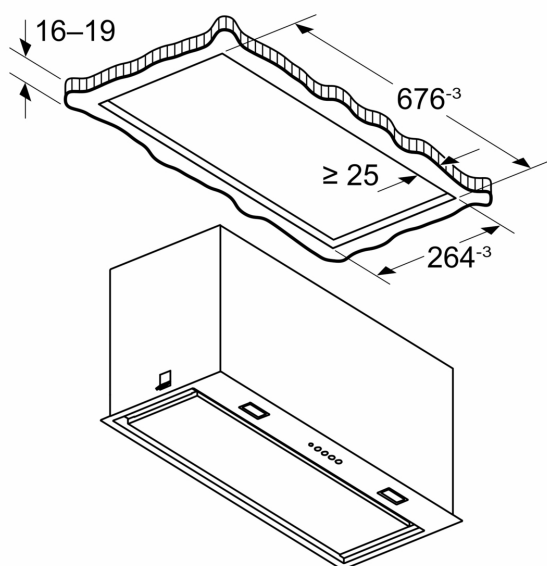

Measurements in mm

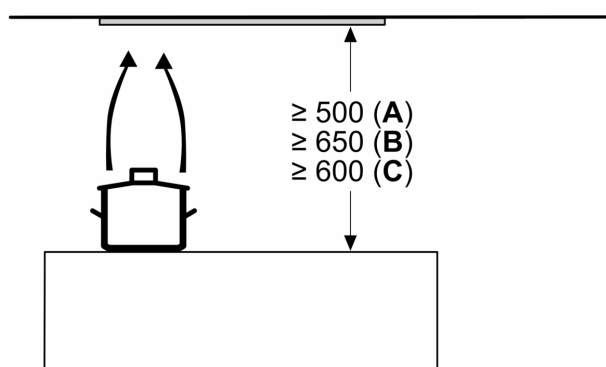

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand