



MASTER Value Decorative LED bulbs

MAS VLE LEDBulbD4-25W E27 T32 GOLD SP G

The new Deco collection transforms your home with a perfect blend of warm white light and a lean, minimalistic lighting experience. With long lifetime, up to 90% energy savings, no flickering and an instant full-level brightness, you will also enjoy soft and evenly distributed light with that trendy and stylish charm for a welcoming harmony in your space.

Product data

General Information	
Cap base	E27 [E27]
Nominal lifetime	15,000 h
Switching Cycle	20,000
Lighting Technology	LED
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Colour Code	818 [CCT of 1800K]
Luminous Flux	250 lm
Colour designation	1800
Correlated Colour Temperature	1800 K
Luminous efficacy (rated) (nom.)	62 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Flickering value (PstLM)	1
Stroboscopic effect	0.4


Photobiological safety according to EN 62471 RG1	
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	4 W
Lamp current (nom.)	24 mA
Wattage equivalent	25 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (nom.)	220-240 V
Temperature	
Ambient temperature range	-20 to +45 °C
T-Case maximum (nom.)	35 °C
Controls and Dimming	
Dimmable	Only with specific dimmers

MASTER Value Decorative LED bulbs

Mechanical and Housing	
Lamp Finish	Amber
Bulb material	Glass
Bulb shape	T32 [T 32 mm]
Approval and Application	
Energy consumption kWh/1,000 hours	4 kWh
EyeComfort	Yes
Product Data	
Order product name	MAS VLE LEDBulbD4-25W E27 T32 GOLD SP G


Full product name	MAS VLE LEDBulbD4-25W E27 T32 GOLD SP G
Full EOC	871951431555600
Order code	31555600
Material no. (12 NC)	929002983102
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8719514315556
Numerator – packs per outer box	6
EAN/UPC – Case	8719514315563

Dimensional drawing




Product	D	C
MAS VLE LEDBulbD4-25W E27 T32 GOLD SP G	33 mm	137 mm

Photometric data




Light Distribution Diagram - MAS VLE LEDBulbD4-25W E27 T32 GOLD SP G



General uniform lighting - MAS VLE LEDBulbD4-25W E27 T32 GOLD SP G


MASTER Value Decorative LED bulbs

Photometric data

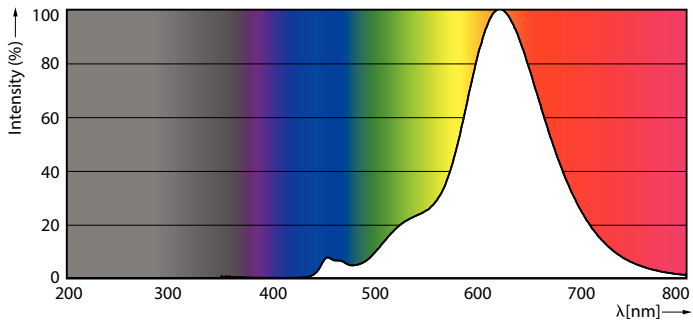


Spectral Power Distribution Colour - MAS VLE LEDBulbD4-25W E27 T32
GOLD SP G

Lifetime

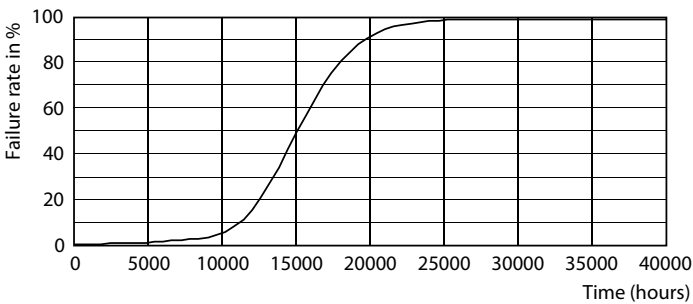

Life Expectancy Diagram - MAS VLE LEDBulbD4-25W E27 T32 GOLD SP G

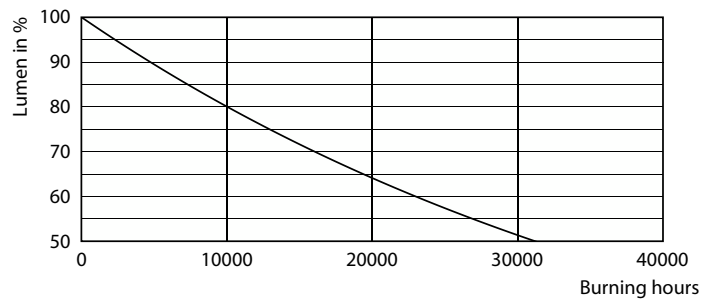

Lumen Maintenance Diagram - MAS VLE LEDBulbD4-25W E27 T32 GOLD SP
G

