



## iQ700, Flex induction hob, 80 cm, flush mount EX801LYC1E

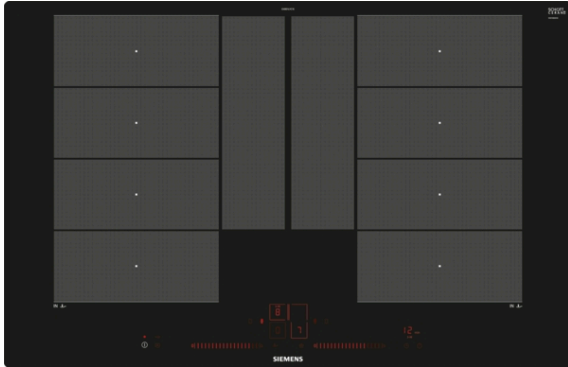

The modern flexInduction cooktop - for greater flexibility when cooking.

- ✓ flexInduction Plus – Smart, extendable cooking zone adapts to your cookware.
- ✓ Dual light slider – Just touch and slide to control your hob.
- ✓ fryingSensor Plus – No more burning or scorching your meals.
- ✓ Adjust heat levels in three steps just by moving the cookware – powerMove Plus.
- ✓ Remembers the heat settings for individual pans while moving them freely across the hob – flexMotion.

### Features

#### Technical Data

Product name/family : Cooking zone ceramic  
 Construction type : Built-in  
 Energy input : Electric  
 Total number of positions that can be used at the same time : 4  
 Width of the appliance : 792 mm  
 Dimensions : 56 x 792 x 512 mm  
 Dimensions of the packed product (HxWxD) : 126 x 953 x 603 mm  
 Net weight : 16.1 kg  
 Gross weight : 19.8 kg  
 Residual heat indicator : yes  
 Location of control panel : Hob front  
 Basic surface material : Ceramic  
 Color of surface : Black  
 Length electrical supply cord : 110 cm  
 EAN code : 4242003716946  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz

### Optional accessories

HZ9SE060	6 pieces Set
HZ9SE040	4 pieces Set
HZ9SE030	Set of 2 pots and 1 pan
HZ9ES100	Espresso maker 4 cups
HZ390522	Griddle Plate
HZ390512	Teppan Yaki (large)
HZ390230	System pan diameter 21 cm
HZ390220	System pan diameter 19 cm
HZ390210	System pan diameter 15 cm
HZ390012	Steaming Rack for Stainless Steel roaste
HZ390011	Stainless Steel roaster with glas lid



## iQ700, Flex induction hob, 80 cm, flush mount EX801LYC1E

### Features

- 80 cm: space for 4 pots or pans.

#### Flexibility of cooking zones

- 2 FlexZones extended: use cookware of any shape or size anywhere within the 40cm long zone or even place it laterally.
- Cooking zone front left: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear right: 230 mm, 200 mm, 2.2 KW (max power 3.7 KW)
- Cooking zone front right: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)

#### Usage convenience

- Dual lightSlider: directly control the power on the two illuminated touch bars (invisible when switched off).
- 17 power levels: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Keep warm function for all cooking zones: keep dishes warm at preset low power level.
- Switch off timer for every cooking zone
- : switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer
- : an alarm sounds at the end of the time set (e.g. for pasta).
- Count-up timer
- : shows how much time has passed since starting the timer (e.g. for potatoes).

#### Time saving & efficiency

- powerBoost for all zones: boil water more quickly thanks to 50% more energy than at the highest standard level.
- panBoost: heat up pans more quickly than at the highest standard level while protecting the pan coating.
- Automatic join split: when placing large cookware, the hob automatically connects two cooking zones into a large continuous one.
- powerMove Plus (3 levels): increase or decrease the power level simply by moving the pot forwards or backwards.
- flexMotion: when moving a pot to a different cooking zone, transfer all previous settings to the new zone at the touch of a button.
- quickStart Function: when switching on, the hob automatically selects the cooking zone with cookware (placed in off-mode).
- reStart Function: in case of unintentional switch-off, restore all previous settings by switching on the hob again within 4 seconds.

#### Cooking assistance

- fryingSensor Plus with 5 temperature settings: prevents scorching with the automatic temperature regulation of the integrated sensor.

#### Design

- Flush-Top Frame installation: seamless transition of hob and worktop makes cleaning easier and integrates the hob beautifully.

#### Safety

- Residual heat indicator (2 stage): indicates which cooking zones are still hot or warm.

- Childproof lock: prevent unintended activation of the hob.
- Wipe protection function: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main Switch: switch off all cooking zones at the touch of a button.
- Safety switch-off: for safety reasons, heating stops after a preset time without interaction (customizable).
- Energy consumption display: shows the electricity consumption of the last cooking process.

#### Installation

- Dimensions of the product (HxWxD mm): 56 x 792 x 512
- Required niche size for installation (HxWxD mm): 56 x 796 x 516
- Min. worktop thickness: 16 mm
- Connected load: 7400 W
- powerManagement function: limit the maximum power if needed (depends on fuse protection of electric installation).
- Power cord: 1.1 m without plug, loose insert in packaging (electrical connection by electrician necessary)
- For installation in stone, granitic or synthetic worktops. Other worktop materials require a suitability check with the worktop manufacturer.

## iQ700, Flex induction hob, 80 cm, flush mount EX801LYC1E

### Dimensioned drawings

